

**SINGLE GLAZED ALUMINIUM
 FRAMEWORK SYSTEM**

The market leading low rise aluminium facade system which offers architects and specifiers a comprehensive array of integrating profiles and components, variable corner angles and glazing options, for design flexibility and time-proven durability.



The Parkside Group Ltd
 Unit 5 - The Willow Centre,
 17 Willow Lane, Mitcham
 Surrey CR4 4NX

Telephone: 020 8685 9685
 Fax No: 020 8646 5096
 Email: Sales@Parksidegrp.co.uk

COMAR 1


SINGLE GLAZED ALUMINIUM FRAMEWORK SYSTEM



- Developed over many years this is the most comprehensive low rise facade product on the market, integrating an immense range of well-proven system profiles and components with variable corner angles and an expansion facility to offer architects and specifiers flexibility, variety and durability in the design and construction of storefronts, entrances and partitions.



- Competitive costing.
- Wide range of glazing options; 4mm to 13.5mm thick glass.
- Optional glazing beads and carriers for special conditions.

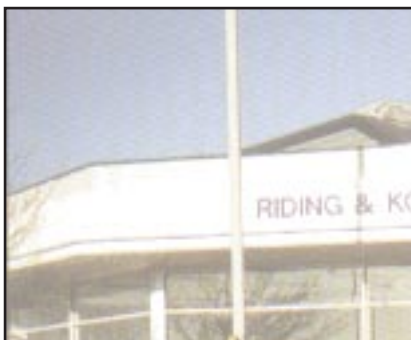

The COMAR TECHNICAL MANUAL contains full specifications and fabrication details of the entire range of COMAR systems

REFER TO COMAR DETAIL SHEETS INDICATED	
SHEET No.	SHEET SUB TITLE
1X-01	SILL DETAILS
1X-02	TRANSOM/MIDRAIL DETAILS
1X-03	HEAD DETAILS
1X-04	JAMB DETAILS
1X-05	MULLION DETAILS
1X-06	CORNER POST DETAILS
1X-07	THRESHOLD DETAILS
1X-08	HEADER DETAILS
1X-09	JAMB/MULLION DETAILS



TEL: 020 8685 9685

■ Wide choice of COMAR 7 Aluminium Door configurations with 'fingerguard' options.

■ Wide selection of COMAR 5 Aluminium Window types.



■ **MATERIALS**

Extruded profiles are to BS EN 515, EN 755 and EN 573. Glazing gaskets and seals are extruded from EPDM.

■ **FINISHES**

Aluminium profiles are finished in the following specifications: Silver, bronze and black anodising to BS1615 or BS4842. Polyester powder coating to BS6496.

■ **CONSTRUCTION**

A two part channel and plate mullion clip together to form a 100mm x 45mm box section enabling modular sash construction. All main extrusions have four screw fixing ports.



■ **GLAZING**

Recessed glazing pocket with a wide range of gaskets for 4mm to 13.5mm thick glass. Optional beads and carriers are available for special conditions.

■ **PERFORMANCE**

COMAR 1 Framing Systems conform to recognised industry standards adopted by trade associations, i.e.: The Council for Aluminium in Building. The system also conforms to many of the requirements for aluminium windows specification BS4873.

COMAR 1 OFFERS DESIGN VARIETY WITH TIME-PROVEN DURABILITY



TEL: 020 8685 9685

COMAR 1

SINGLE GLAZED ALUMINIUM FRAMEWORK SYSTEM



■ IT'S ALL IN THE TECHNICAL MANUAL...



The Comar Technical Manual is packed full of information on all Comar Architectural Aluminium Systems, including: specifications, profile broadsheets, composites, framing limitations and glazing options. Call for yours today.

■ TECHNICAL BACK-UP

An experienced Sales Team covers the UK while the Technical Department offers an unsurpassed design and installation advice service to designers, specifiers and fabricators. Simply ring 020 8685 9685.

■ FOR MORE INFORMATION

To find out more about COMAR 1 or any of Comar's other architectural aluminium systems, or to obtain your personal copy of the COMAR TECHNICAL MANUAL, call Madeline Whitehead on 020 8685 9685 or fax on 020 8646 5096.

Comar projects are carried out using approved fabricators throughout the UK, under the supervision of Comar Architectural Aluminium Systems, if required.

AUTHORISED DEALER:

Four empty rectangular boxes for listing authorised dealers.



Comar Architectural Aluminium Systems
The Parkside Group Ltd., Unit 5 - The Willow Centre,
17 Willow Lane, Mitcham, Surrey CR4 4NX
Telephone: 020 8685 9685 Fax No: 020 8646 5096
Email: Sales@Parksidegrp.co.uk

The Parkside Group reserves the right to alter products or specifications without prior notification.