



THERMALLY BROKEN
ALUMINIUM
WINDOW SYSTEM

A wide variety of high performance durable and attractive thermally broken aluminium windows can be created from this comprehensive system.



The Parkside Group Ltd
Unit 5 - The Willow Centre,
17 Willow Lane, Mitcham,
Surrey CR4 4NX

Telephone: 020 8685 9685
Fax No: 020 8646 5096
Email: Sales@Parksidegrp.co.uk

COMAR 5

THERMALLY BROKEN ALUMINIUM WINDOW SYSTEM



- The COMAR 5 System for thermal break commercial aluminium windows offers a wealth of design options to the architect and specifier, including: fixed lights; reversible horizontal or vertical pivot; top and side projected-out casements; tilt/turn and the remarkable reversible top swing, with additional profiles providing exceptional product type alternatives from low stock inventory.

COMAR 5 windows integrate with all other COMAR systems and can be used for both new build or replacement work.

Like all COMAR systems, COMAR 5 conforms to all recognised industry standards and has been developed in accordance with ISO 9000, and has successfully passed tests for weathertightness to BS6375 part 1, 1989.



TEL: 020 8685 9685

- All windows thermally broken.
- Wide choice of style options.
- Single/double glazing options.
- Low maintenance.
- High durability.
- Integrates with all other COMAR systems.
- For new build or replacement projects.

■ **CONSTRUCTION**


According to type, COMAR 5 windows are constructed using designated components from the array of profiles and other elements that make up the system, which are clipped or screwed together. Corner joints are achieved by crimp indent of eccentric cam. Thermal barrier is poured-in place polyurethane resin.

■ **GLAZING**

The option of single or double glazing with a choice of glass thicknesses from 4mm to 28mm via a series of varying calibre glazing beads.

■ **PERFORMANCE**

COMAR 5 windows conform to recognised industry standards adopted by trade associations, i.e: The Council for Aluminium in Building and conform to the requirements of BS4873: 1986, Specification for Aluminium Alloy Windows.

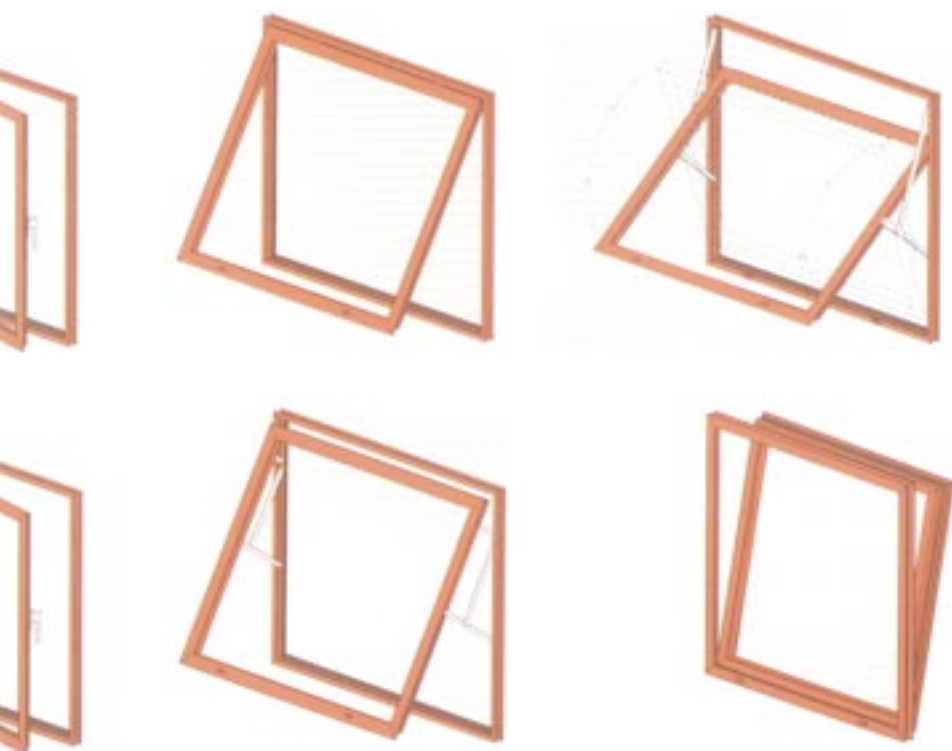

COMAR 5 OFFERS THE WIDEST CHOICE OF DURABLE HIGH PERFORMANCE, LOW MAINTENANCE ALUMINIUM WINDOW STYLES.



TEL: 020 8685 9685

COMAR 5

THERMALLY BROKEN ALUMINIUM WINDOW SYSTEM



■ IT'S ALL IN THE TECHNICAL MANUAL...



The Comar Technical Manual is packed full of information on all Comar Architectural Aluminium Systems, including: specifications, profile broadsheets, composites, framing limitations and glazing options. Call for yours today.

■ TECHNICAL BACK-UP

An experienced Sales Team covers the UK while the Technical Department offers an unsurpassed design and installation advice service to designers, specifiers and fabricators. Simply ring 020 8685 9685.

■ FOR MORE INFORMATION

To find out more about COMAR 5 or any of Comar's other architectural aluminium systems, or to obtain your personal copy of the COMAR TECHNICAL MANUAL, call Madeline Whitehead on 020 8685 9685 or fax on 020 8646 5096.

Comar projects are carried out using approved fabricators throughout the UK, under the supervision of Comar Architectural Aluminium Systems, if required.

AUTHORISED DEALER:

Four empty rectangular boxes for listing authorised dealers.



Comar Architectural Aluminium Systems
The Parkside Group Ltd., Unit 5 - The Willow Centre,
17 Willow Lane, Mitcham, Surrey CR4 4NX
Telephone: 020 8685 9685 Fax No: 020 8646 5096
Email: Sales@Parksidegrp.co.uk

The Parkside Group reserves the right to alter products or specifications without prior notification.